


FLAMM-CHECK FR4



Application
Carpet underlay

- Good impact sound insulation
- Good walking comfort
- High recovery capacity
- Environmentally friendly material
- Flame retardant

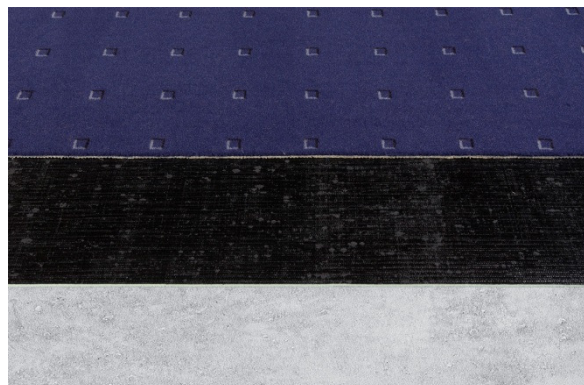

Material	Latex with PP fleece	
Thickness	4 mm	
Weight	~ 1200 g/m ²	
Roll size	2 m x 25 m = 50 m ²	
Impact sound insulation	~ 26 dB	IS
Heat transfer resistance	0.058 m ² K/W	R
Burning behaviour	Flame retardant 5.3	
		

Installation instructions

Substrate preparation	The substrate must meet the requirements of recommendation SIA V 251/1 with regard to evenness and strength, moisture values according to SIA 253 must be observed.
Installation	The laying direction must be transverse to the running direction of the floor covering. The detailed installation instructions must always be observed.
Under carpets	Lay inverted, with PP fleece facing upwards, fully bond on both sides or lay loosely when tensioning the carpet.
Under parquet/laminate	Laying in a fallen position, adhesive layer downwards, floating laying of the floor covering. Always first lay a PE film at least 0.2 mm thick on mineral substrates. Never lay PE foil on organic substrates!
Glue recommendation	Dispersion adhesive, adapted to the composition of the floor covering.

The data sheets of BodenSchweiz and ISP as well as the SIA standards must be observed!

 Carpet

 Hydro Click/ LVT

 Parquet & Laminate

 PVC, CV, caoutchouc, (Linoleum)

 Special underlay

Siltex AG

Allmendstrasse 4 - CH-6210 Sursee - Phone +41 (0)41 926 0 926 - Fax +41 (0)41 926 0 929 - info@siltex.ch - www.siltex.ch